




Back-to-back ceiling mount assembly, isometric view

TECHNICAL DRAWING

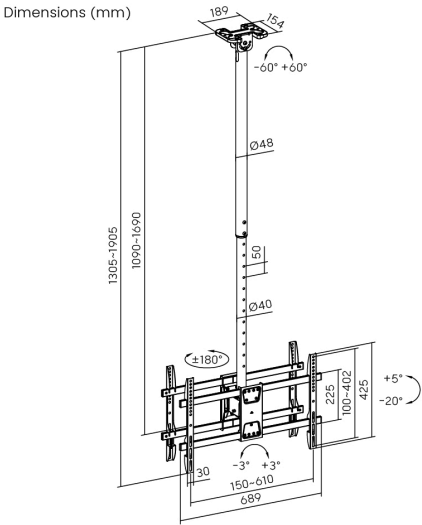

4x Strength Tested

Back-to-Back Dual Screen

Pitched Roof Compatible

43"-86"

SCREEN SIZE RANGE

50 kg x2 (110 lbs x2)

WEIGHT CAPACITY

600 x 400 mm

MAX VESA PATTERN

Pole length range **1090-1690 mm (42.9"-66.5")**

Tilt range **+5° / -20°**

Pole rotation **±180°**

Screen level adjust **+3° / -3°**

Curved TV compatible **Yes**

Cable management **Yes, integrated**

DIMENSIONS & MOUNTING

Overall length	1305-1905 mm, telescoping
Pole diameter	Ø48 mm upper / Ø40 mm lower
VESA hole pattern	200x200 up to 600x400, 7 patterns
Max hole span	610 x 402 mm (per screen)
Installation	Ceiling mounted; verify structural load for 50 kg x2

MATERIAL & CONSTRUCTION

Material	Steel
Pipe size	Ø40x1.2 / Ø48x1.5 mm round tube
Surface finish	Powder coating, fine texture black
Strength test	4x rated load, approved

ADJUSTMENT & MOTION

Screen qty	2, back-to-back
Ceiling plate tilt	±60°, flat or pitched roof
Pole rotation	±180°, around pole
TV tilt	+5° to -20°, toolless, per screen
Screen level adjust	+3° to -3°, per screen

INCLUDED HARDWARE

Panel type	Detachable VESA panel, x2
Cable management	Internal routing through pole
Ceiling plate	Fixed, tiltable for pitched roof
Fasteners	Ceiling mounting hardware sized to 50 kg x2 capacity