




Motorized swing arm assembly, with RF remote

TECHNICAL DRAWING

Dimensions (mm)

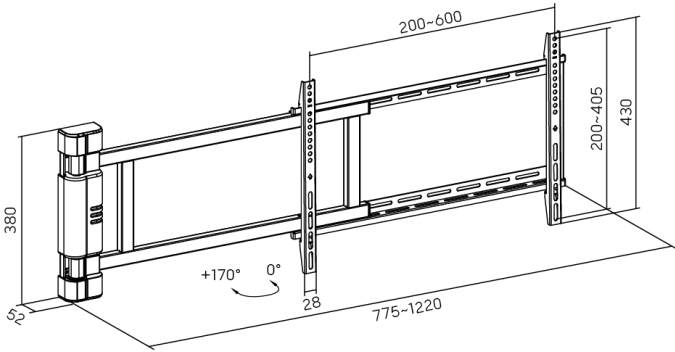

CE Certified

3x Strength Tested

Collision Avoidance

32"-75"

SCREEN SIZE RANGE

50 kg (110 lbs)

WEIGHT CAPACITY

600 x 400 mm

MAX VESA PATTERN

Wall-to-VESA profileMin. 56 mm (2.2")

Swivel range0° / +170°

ControlRF remote, position memory

Curved TV compatibleYes

Cable managementYes, integrated

DIMENSIONS & MOUNTING

Assembly envelope	775-1220 x 430 x 56 mm (extended)
VESA hole pattern	200x200 up to 600x400, 12 patterns
Max hole span	600 x 400 mm
Installation	Solid wall, single stud
Load rating	Verify substrate for 50 kg/screen

ADJUSTMENT & MOTION

Swivel range	0° to +170°, motorized
Control	RF remote, programmable position memory
Collision avoidance	Automatic, halts on obstacle contact
Wall extension	Min. 56 mm from wall
Curved TV compatible	Yes

MATERIAL & CONSTRUCTION

Material	Steel, aluminum, plastic
Pipe size	30x15x1.5 / 30x20x1.5 mm square tube
Surface finish	Powder coating, matte black/white
Strength test	3x rated load, approved
Certification	CE, FCC, ErP, AS/NZS, RoHS compliant

INCLUDED HARDWARE

Remote control	RF remote included
Power supply	Input AC 100-240V 50/60Hz; output DC 12V, 1A
Power cord	1.5 m (4.9 ft)
Fasteners	Wall anchors sized to substrate and 50 kg capacity