




Detachable interface head, quick-release joint shown

TECHNICAL DRAWING

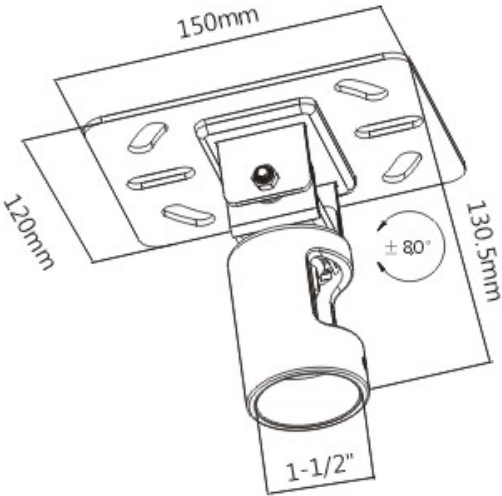

Detachable Head

35kg Rated

Cable Management

DIMENSIONS & MOUNTING

Overall dimensions	140 x 470 x 470 mm (5.5" x 18.5" x 18.5")
Drop range	130-470 mm (5.1"-18.5"), telescopic
Ceiling plate	150 x 120 mm, 4-hole pattern
Pipe thread	1.5" North American standard (NPT)
Head design	Detachable interface plate, quick-release
Installation	Ceiling mounted, flat or pitched roof

MATERIAL & CONSTRUCTION

Materials	Steel, reinforced plastic
Surface finish	Powder coating
Color	Matte black
Weight capacity	35 kg (77 lbs)
Product category	Universal projector ceiling mount

ADJUSTMENT & MOTION

Tilt range	+20° to -20°
Swivel range	+8° to -8°
Rotation	+180° to -180° (360° total)
Head joint	±80° swivel at ceiling plate bracket
Cable management	Integrated, routed through mount body
Direction indicator	No

INCLUDED HARDWARE

Interface plate	Detachable, bolts to projector separately for bench alignment
Release mechanism	Quick-release, click-on to ceiling-fixed head
Fasteners	Ceiling fixings and projector plate screws (verify against ceiling structure)
Packaging	Normal/ziplock polybag

35 kg (77 lbs)

WEIGHT CAPACITY

130-470 mm

DROP RANGE

360°

ROTATION

Tilt range +20° / -20°

Swivel range +8° / -8°

Pipe thread 1.5" NPT (North American)

Cable management Yes