




Full-motion arm assembly, isometric view fully extended

TECHNICAL DRAWING

Dimensions (mm)

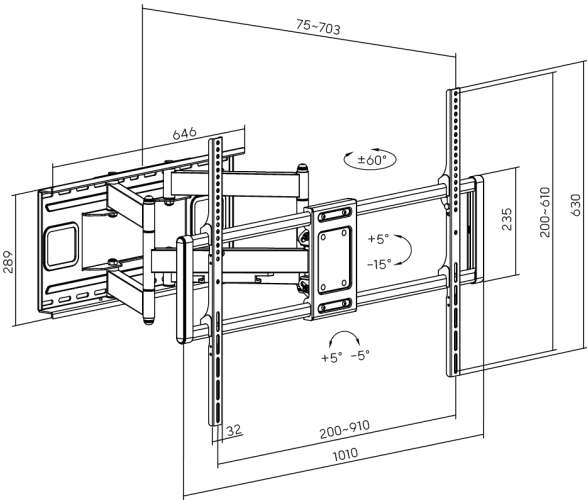

RoHS Certified

3x Strength Tested

Curved TV Compatible

60"-120"

SCREEN SIZE RANGE

120 kg (264 lbs)

WEIGHT CAPACITY

900 x 600 mm

MAX VESA PATTERN

Wall-to-VESA profile 75-703 mm (3"-27.7")

Tilt range +5° / -15°

Swivel range +60° / -60°

Screen level adjust +5° / -5°

Curved TV compatible Yes

Cable management Yes, integrated

DIMENSIONS & MOUNTING

Assembly envelope	703 x 1010 x 630 mm (extended)
VESA hole pattern	200x200 up to 900x600, 11 patterns
Max hole span	910 x 610 mm
Installation	Solid wall, dual-stud (406/450/600 mm)
Load rating	Verify substrate for 120 kg/screen

ADJUSTMENT & MOTION

Tilt range	+5° to -15°, toolless
Swivel range	+60° to -60°, dual arm
Screen level adjust	+5° to -5°
Wall extension	75-703 mm from wall
Curved TV compatible	Yes

MATERIAL & CONSTRUCTION

Material	Steel
Surface finish	Powder coating, fine texture black
Strength test	3x rated load, approved
Certification	RoHS compliant

INCLUDED HARDWARE

Quick-release latch	Toolless display lock/unlock
Cable management	Integrated channel, keeps runs tidy
Bubble level	Hook-on, included in kit
Fasteners	Wall anchors sized to substrate and 120 kg capacity