




Isometric view, full-motion arm extended

TECHNICAL DRAWING

Dimensions (mm)

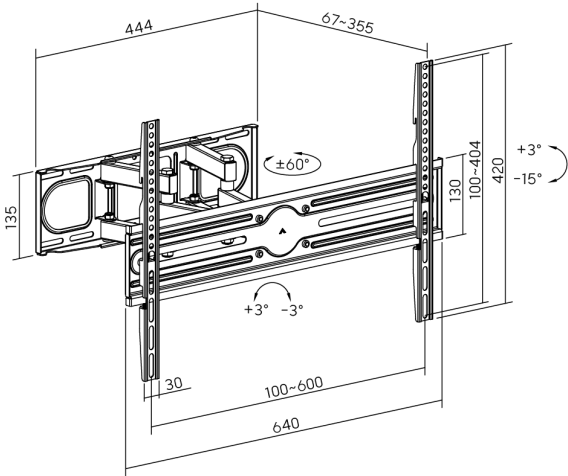

RoHS Certified

3x Strength Tested

Anti-theft: No

DIMENSIONS & MOUNTING

Assembly envelope	355 x 640 x 420 mm
VESA hole pattern	15 patterns, 100x100 up to 600x400 (full list on drawing)
Max hole span	600 x 400 mm
Stud spacing	Dual stud, 406 mm centers; also fits solid wall with correct anchors
Wall plate type	Fixed, non-removable
VESA plate type	Detachable panel

MATERIAL & CONSTRUCTION

Materials	Cold-rolled steel, plastic covers
Bracket arm	1.2 mm cold-rolled sheet
VESA panel	1.5 mm cold-rolled sheet
Wall plate	1.8 mm cold-rolled sheet
Finish	Powder coating, fine texture black
Strength test	3x rated load, approved
Certification	RoHS compliant

ADJUSTMENT & MOTION

Screen leveling	+3° to -3°, independent of tilt/swivel
Height adjustment	2-level bracket adjustment
Direction indicator	Yes, on arm assembly
Cable management	Yes, hook-and-loop fasteners included
Bubble level	Hook-on type, included in hardware pack
Anti-theft	Not included

INCLUDED HARDWARE

Mounting style	Picture-hanging style, hook engages wall plate before final tightening
Fasteners	VESA screws, wall anchors, stud lag bolts (verify against TV VESA plate thickness)
Packaging	Ziplock/compartiment polybag, RoHS labeled

37"-80"

SCREEN SIZE RANGE

40 kg (88 lbs)

WEIGHT CAPACITY

600 x 400 mm

MAX VESA PATTERN

Wall-to-VESA profile 67-355 mm

Tilt range +3° / -15°

Swivel range +60° / -60°

Curved TV compatible Yes