




Extend-out tilt mount assembly, isometric view

TECHNICAL DRAWING

Dimensions (mm)

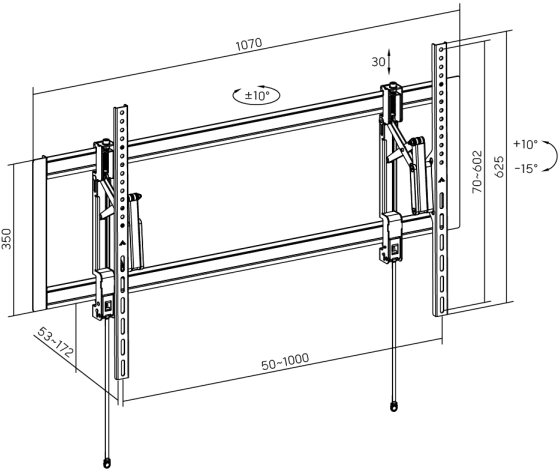

UL Certified

4x Strength Tested

Anti-Theft Structure

55"-105"

SCREEN SIZE RANGE

80 kg (176 lbs)

WEIGHT CAPACITY

1000 x 600 mm

MAX VESA PATTERN

Wall-to-VESA profile 53-172 mm (2.1"-6.8")

Tilt range +10° / -15°

Swivel range +10° / -10°

Curved TV compatible Yes

Cable management No

Anti-theft Yes, locking hole

DIMENSIONS & MOUNTING

Assembly envelope	1070 x 625 x 172 mm (extended)
VESA hole pattern	200x200 up to 1000x600, 12 patterns
Max hole span	1000 x 602 mm
Installation	Solid wall, dual-stud (406/450/600 mm)
Load rating	Verify substrate for 80 kg/screen

MATERIAL & CONSTRUCTION

Material	Steel, plastic
Surface finish	Powder coating, fine texture black
Metal thickness	2 mm cold-rolled steel (arm & plate)
Strength test	4x rated load, approved
Certification	UL listed

ADJUSTMENT & MOTION

Tilt range	+10° to -15°
Swivel range	+10° to -10°, per arm
Extend-out range	53-172 mm from wall
Lateral shift	Yes, off-center stud compensation
Curved TV compatible	Yes

INCLUDED HARDWARE

Anti-theft locking	Locking hole, padlock-ready (padlock not included)
Quick-release	Spring locks with pull cords
Bubble level	Hook-on, included in kit
Fasteners	Wall anchors sized to substrate and 80 kg capacity