




Bracket assembly, isometric view with locking points marked

TECHNICAL DRAWING

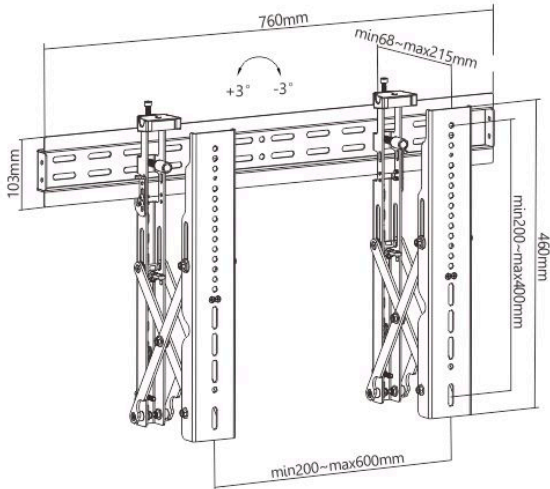

4x Strength Tested

Anti-theft: Yes

Lateral Shift

DIMENSIONS & MOUNTING

Assembly envelope	760 x 68-215 x 465 mm
VESA hole pattern	200x200, 400x200, 300x300, 400x400, 600x400
Max hole span	600 x 400 mm
Lateral shift span	200-400 mm (brackets), up to 600 mm max
Installation	Solid wall; verify substrate load rating for 45 kg/screen

MATERIAL & CONSTRUCTION

Material	Steel
Wall plate	2 mm cold-rolled sheet
Bracket arm	2.5 mm cold-rolled sheet
Surface finish	Powder coating, fine texture black
Strength test	4x rated load, approved

ADJUSTMENT & MOTION

Screen level adjust	+3° to -3°, independent leveling knobs
Pop-out extension	68-215 mm from wall, press-release mechanism
Pop-out lock	Prevents accidental pop-out when engaged
Viewing orientation	Portrait or landscape
Screen qty	1 per bracket set (tile in array)

INCLUDED HARDWARE

Anti-theft locking hole	Accepts padlock (padlock not included)
Connect plates	Available separately for multi-screen arrays
Fasteners	Wall anchors sized to substrate and 45 kg capacity
Packaging	Normal/ziplock or compartment polybag

37"-70"

SCREEN SIZE RANGE

45 kg (99 lbs)

WEIGHT CAPACITY

600 x 400 mm

MAX VESA PATTERN

Wall-to-VESA profile 68-215 mm (2.7"-8.5")

Screen level adjust +3° / -3°

Lateral shift Yes, width-adjustable brackets

Screen qty per bracket 1

Anti-theft Yes, locking hole