



Bracket assembly, isometric view with locking points marked

45"-70"

SCREEN SIZE RANGE

70 kg (154 lbs)

WEIGHT CAPACITY

600 x 400 mm

MAX VESA PATTERN

Wall-to-VESA profile **120-325 mm (4.7"-12.8")**

Tilt range **+2° / -3°**


Height adjustment **+13 mm**

Depth adjustment **+13.5 mm**

Screen qty per bracket **1**

Anti-theft **Yes, locking kit**

TECHNICAL DRAWING

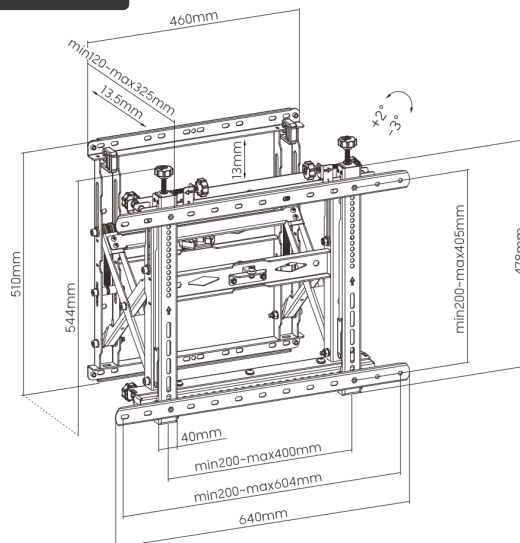

RoHS Certified

4x Strength Tested

Anti-theft: Yes

DIMENSIONS & MOUNTING

Assembly envelope	640 x 120-325 x 544 mm
VESA hole pattern	200x200, 300x200, 400x200, 300x300, 400x300, 400x400, 600x400
Max hole span	604 x 405 mm
Lateral shift span	200-400 mm (brackets), up to 604 mm max
Installation	Solid wall; verify substrate load rating for 70 kg/screen

ADJUSTMENT & MOTION

Height adjustment	+13 mm, tool-free knob
Depth adjustment	+13.5 mm, two knobs, same direction
Tilt range	+2° to -3°, two knobs, opposite directions
Viewing orientation	Portrait or landscape
Screen qty	1 per bracket set (tile in array)

MATERIAL & CONSTRUCTION

Material	Steel, plastic
Surface finish	Powder coating, fine texture black
Strength test	4x rated load, approved
Certification	RoHS compliant

INCLUDED HARDWARE

Quick-release kit	Toolless mounting bracket engagement
Locking kit	Per-panel lock, prevents accidental pop-out
Adjustment knobs	Tool-free height/depth/tilt knobs
Fasteners	Wall anchors sized to substrate and 70 kg capacity