




Bracket assembly, pop-out extended for service access

TECHNICAL DRAWING

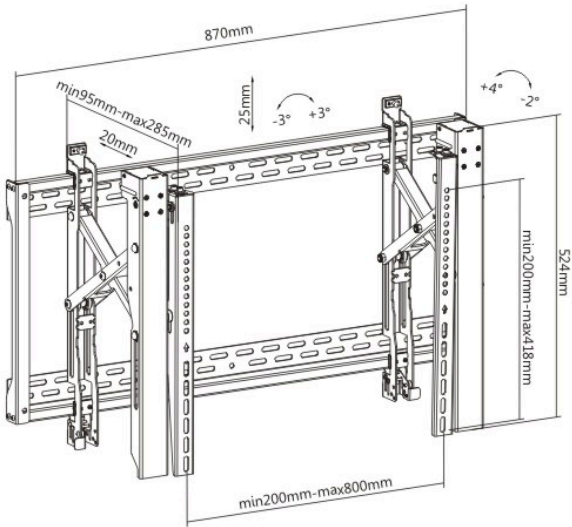

RoHS Certified

4x Strength Tested

Anti-theft: Yes

DIMENSIONS & MOUNTING

Assembly envelope	870 x 95-285 x 524 mm
VESA hole pattern	200x200 up to 800x400 (8 patterns)
Max hole span	800 x 400 mm
Lateral shift span	200-800 mm between brackets
Installation	Solid wall; verify substrate load rating for 70 kg/screen
Screen qty	1 per bracket set (tile in array)

MATERIAL & CONSTRUCTION

Material	Steel
Wall plate	2 mm cold-rolled sheet
Bracket arm	2 mm cold-rolled sheet
Surface finish	Powder coating, fine texture black
Strength test	4x rated load, approved
Certification	RoHS compliant

ADJUSTMENT & MOTION

Depth adjustment	20 mm fine micro-adjustment
Height adjustment	25 mm fine micro-adjustment
Tilt range	+4° to -2°
Screen level	+3° to -3°, independent of tilt
Pop-out extension	Quick-release latch, tool-free service access
Direction indicator	Yes, on bracket arm

INCLUDED HARDWARE

Latch mechanism	Quick-release pop-out latch with lock/unlock mode
Anti-theft hole	Accepts padlock (not included)
Fasteners	Wall anchors sized to substrate and 70 kg capacity (verify on site)
Packaging	Compartmentalized polybag, RoHS labeled

45"-80"

SCREEN SIZE RANGE

70 kg (154 lbs)

WEIGHT CAPACITY

800 x 400 mm

MAX VESA PATTERN

Wall-to-VESA profile 95-285 mm (3.7"-11.2")

Fine adjustment (depth/height) 20 mm / 25 mm

Tilt range +4° / -2°

Screen level +3° / -3°

Anti-theft Yes, locking hole