




Bracket assembly, isometric view with locking points marked

TECHNICAL DRAWING

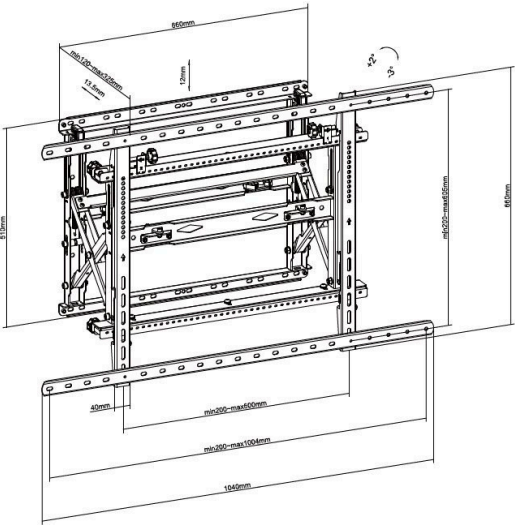

RoHS Certified

2.5x Strength Tested

Anti-theft: Yes

45"-110"

SCREEN SIZE RANGE

130 kg (286 lbs)

WEIGHT CAPACITY

1000 x 600 mm

MAX VESA PATTERN

Wall-to-VESA profile 120-325 mm (4.7"-12.8")

Tilt range +2° / -3°

Pop-out extension 190 mm

Height adjustment +13 mm

Depth adjustment +13.5 mm

Anti-theft Yes, locking kit

DIMENSIONS & MOUNTING

Assembly envelope	1040 x 120-325 x 660 mm
VESA hole pattern	600x400, 600x600, 800x400, 800x600, 1000x600
Max hole span	1000 x 600 mm
Lateral shift span	200-600 mm (brackets), up to 1004 mm max
Installation	Solid wall; verify substrate load rating for 130 kg/screen

MATERIAL & CONSTRUCTION

Material	Steel
Surface finish	Powder coating, black
Strength test	2.5x rated load, approved
Certification	RoHS compliant

ADJUSTMENT & MOTION

Height adjustment	+13 mm, tool-free knob
Depth adjustment	+13.5 mm, two knobs, same direction
Tilt range	+2° to -3°, two knobs, opposite directions
Pop-out extension	190 mm, push-to-open/close service access
Screen qty	1 per bracket set (tile in array)

INCLUDED HARDWARE

Locking kit	Per-panel lock, prevents accidental pop-out
Anti-theft	Padlock-compatible hole (padlock not included)
Adjustment knobs	Tool-free height/depth/tilt knobs
Fasteners	Wall anchors sized to substrate and 130 kg capacity