




Full-motion arm assembly, isometric view fully extended

TECHNICAL DRAWING

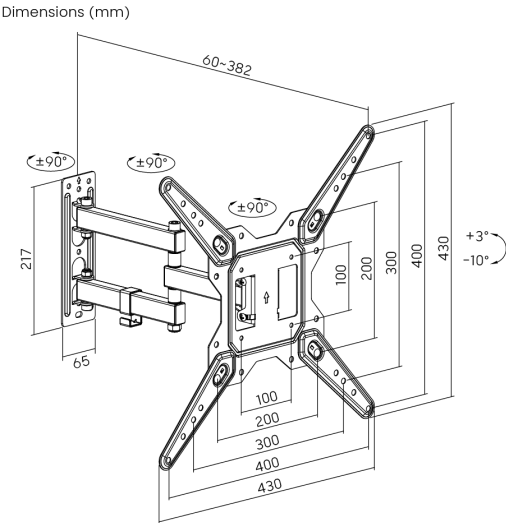

3x Strength Tested

Curved TV Compatible

Cable Management

23"-65"

SCREEN SIZE RANGE

30 kg (66 lbs)

WEIGHT CAPACITY

400 x 400 mm

MAX VESA PATTERN

Wall-to-VESA profile 60-382 mm (2.4"-15")

Tilt range +3° / -10°

Swivel range +90° / -90°

Installation Solid wall, single stud

Curved TV compatible Yes

Cable management Yes, integrated

DIMENSIONS & MOUNTING

Assembly envelope	382 x 430 x 430 mm (extended)
VESA hole pattern	100x100 up to 400x400, 9 patterns
Max hole span	400 x 400 mm
Installation	Solid wall, single stud
Load rating	Verify substrate for 30 kg/screen

ADJUSTMENT & MOTION

Tilt range	+3° to -10°, toolless
Swivel range	+90° to -90°, dual arm
Wall extension	60-382 mm from wall
Direction indicator	Yes, on arm assembly
Curved TV compatible	Yes

MATERIAL & CONSTRUCTION

Material	Steel
Pipe size	30 x 20 x 1.2 mm square steel tube
Surface finish	Powder coating, fine texture black
Strength test	3x rated load, approved

INCLUDED HARDWARE

Cable management	Integrated channel, keeps runs tidy
Panel type	Detachable panel
Fasteners	Wall anchors sized to substrate and 30 kg capacity