




Isometric view, VESA plate detached from wall bracket

TECHNICAL DRAWING

Dimensions (mm)

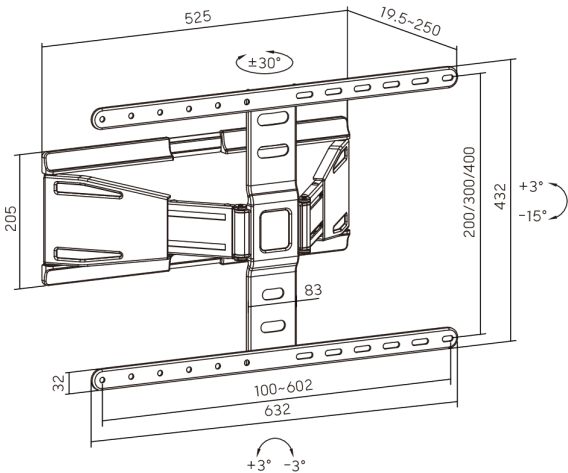

RoHS Certified

4x Strength Tested

Anti-theft: No

DIMENSIONS & MOUNTING

Wall plate size	632 x 32 mm
VESA plate size	525 x 432 mm
VESA hole pattern	13 patterns, 100x200 up to 600x400 (full list on drawing)
Max hole span	602 x 400 mm
Stud spacing	Dual stud, 406 mm or 450 mm centers; also fits solid wall with correct anchors
VESA plate type	Detachable, lift-off hook mount

MATERIAL & CONSTRUCTION

Materials	Cold-rolled & pickling steel, plastic covers
Steel gauge	3.0 mm arm, 2.5 mm VESA panel
Finish	Powder coating, matte black
Strength test	4x rated load, approved
Certification	RoHS compliant

ADJUSTMENT & MOTION

Screen leveling	+3° to -3°, independent of tilt/swivel
Arm type	Dual folding swing arm, full-motion articulating
Direction indicator	Yes, on arm assembly
Cable management	Yes, integrated clips along vertical spine
Bubble level	Hook-on type, included in hardware pack
Anti-theft	Not included

INCLUDED HARDWARE

Decorative covers	Snap-on, concealing VESA screws
Mounting hook	Engages wall plate before final tightening, holds assembly during install
Fasteners	VESA screws, wall anchors, stud lag bolts (verify TV plate thickness)
Packaging	Compartmentalized polybag, RoHS labeled

43"-90"

SCREEN SIZE RANGE

50 kg (110 lbs)

WEIGHT CAPACITY

600 x 400 mm

MAX VESA PATTERN

Wall-to-VESA profile 19.5-250 mm

Tilt range +3° / -15°

Swivel range +30° / -30°

Curved TV compatible Yes